

AdPower - AD12612

Auxiliary Power Supply/Battery Charger

STANDARD FEATURES:

- Provides 6 or 12 VDC (6 or 12 volt operation)
- 1.2Amps continuous output to power devices
- Transformer purchased separately
- Factory preset at 13.6 VDC, with the jumper set to supply 12 VDC

SPECIFICATIONS:**Battery:**

Supports a standard 4 AH gel cell battery

Transformer Required:

6 volt operation - 12VAC, 20VA (Model 1322/TF3)

12 volt operation - 16.5 VAC, 40VA (Model 1361)

Fuse:

3 Amp fast blow fuse (Model FP1166)

Board Dimensions:

4" x 2" x 13/4"



AdPower - AD25624

Auxiliary Power Supply/Battery Charger

STANDARD FEATURES:

- Provides 12 or 24 VDC (12 or 24 volt operation)
- 2.5Amps continuous output to power devices
- Transformer purchased separately

SPECIFICATIONS:**Battery:**

Supports a standard 4 AH gel cell battery

Transformer Required:

XF30 is recommended and can be used for either 12 or 24VDC operation (1451-24, in red cabinet is an alternate).

Fuse:

6 Amp (part number N9544)


5 Amp (part number 90-9)

Board Dimensions:

6 1/2" x 2" x 1 9/16"



XF30

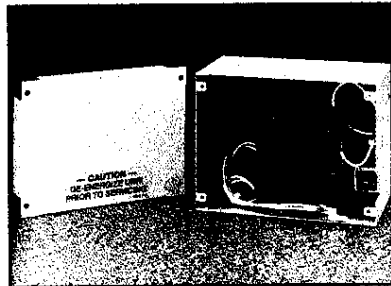

1451-24

ADEMCO

A DIVISION OF PITTMAN CORP.
165 Eileen Way, Syosset, NY 11791